

PO Box 1468 Auburn St. Wollongong NSW 2500

Phone: 1300 763 444 Fax: +61 2 4226 2208 Email: sales@spacepac.com.au ABN 98 002 454 462

WWW.SPACEPAC.COM.AU









PO Box 1468 Auburn St. Wollongong NSW 2500 Phone: 1300 763 444 Email: sales@spacepac.com.au ABN 98 002 454 462


Fax: +61 2 4226 2208

WWW.SPACEPAC.COM.AU

INCREASE PRODUCTIVITY AND REDUCE JOB-RELATED INJURIES WITH THIS ALL-IN-ONE STACKER, TRANSPORTER, AND POSITIONER.

- Minimizes bending and stretching
- Narrow footprint fits through most doorways and tight spaces; no fork truck required
- Provides variable height work surface
- Supports diverse loading requirements
- Electric screw drive lift system provides smooth, quiet operation
- Quick change adapter allows easy changes between attachments
- Up to 350 lb. lifting capacity (120 lb. on high-speed models)
- Lifts 2"/second (4"/second on high-speed models)
- Easy to operate; no certification required; see instructional video on magliner.com

| | SPECIFICAT | IONS | |
|-----------------------------------|----------------|-----------------|------------|
| | 48" Model | 60" Model | 72" Model |
| Attachment height (fully lifted) | 48" | 60" | 72" |
| Attachment height (fully lowered) | 3.5" | 3.5" | 3.5" |
| Overall height | 60" | 72" | 84" |
| Overall depth | 37" | 37" | 37" |
| Weight (base unit) | 101 lbs. | 108 lbs. | 114 lbs. |
| High speed option | Yes | Yes | No |
| Battery capacity (median load) | 125-150 lift o | cycles when ful | ly charged |
| Overall width (14" chassis) | 25" | 25" | N/A |
| Overall width (25" chassis) | 33" | 33" | 33" |
| Chassis width | 14" or 25" | 14" or 25" | 25" |

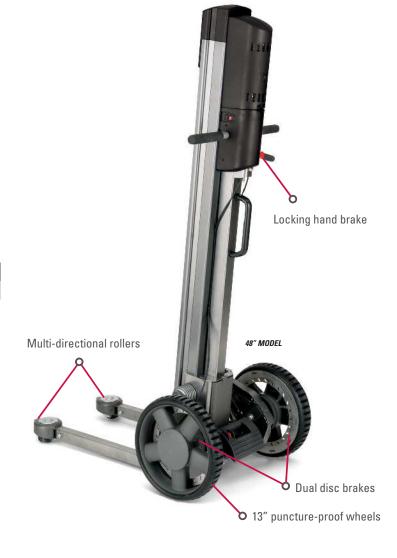



Patent - www.magliner.com/patents



PO Box 1468 Auburn St. Wollongong NSW 2500

Phone: 1300 763 444 Email: sales@spacepac.com.au

WWW.SPACEPAC.COM.AU

Fax: +61 2 4226 2208

ABN 98 002 454 462



Attachments

ONE SYSTEM. MANY TOOLS.

Quickly handle a variety of tasks with the LiftPlus.



| P/N | W" | L" | WT.(LBS.) |
|--------|----|----|-----------|
| 536017 | 18 | 18 | 23.5 |

Platform length expands up to 28". Work clamps, vice, handle, and load-securing back bar included.

BENT FORK



| P/N | W" | L" | WT.(LBS.) | |
|------------------------|----|----|-----------|--|
| 536044 | 21 | 18 | 12.5 | |
| 2 E" baight from floor | | | | |

3.5" height from floor. Available with 14" chassis only.

STRAIGHT FORKS



| P/N | W" | L" | WT.(LBS.) |
|--------|------|------|-----------|
| 536053 | 18.5 | 18.5 | 11.0 |
| 536048 | 20 | 32 | 16.0 |
| 536060 | 21 | 18 | 11.5 |

5" height from floor.

V-TRAY



| P/N | W" | L" | WT.(LBS.) |
|--------|----|------|-----------|
| 536054 | 19 | 24.5 | 10.0 |

Accommodates cylindrical products 4" to 24" (requires 536053 fork attachment).

PAIL LIFTER

ARBOR



| P/N | D" | L" | WT.(LBS.) |
|--------|-----|----|-----------|
| 536039 | 1.5 | 24 | 7.5 |

Accommodates rolled material.

BOOM AND CHAIN



| P/N | D" | L" | WT.(LBS.) | |
|--------|-------|----|-----------|--|
| 536088 | 1.875 | 24 | 5.5 | |

Adjustable boom plus chain/hook assembly (requires 536039 arbor attachment).

Have a special application?

Call us today to discuss a custom attachment.

STEEL PLATFORMS

| P/N | D" | L" | WT.(LBS.) | |
|--------|----|----|-----------|--|
| 536093 | 14 | 16 | 11.0 | |

Accommodates three 5-gallon pails. Hook height adjustable 3" to 34" high from top of forks.



| P/N | W" | L" | WT.(LBS.) | |
|--------|----|----|-----------|--|
| 536025 | 24 | 24 | 15.5 | |

Requires 536044 or 536060 fork attachment.



| P/N | W" | L" | WT.(LBS.) |
|--------|----|----|-----------|
| 536033 | 34 | 34 | 30.0 |

Requires 536048 fork attachment.



| P/N | W" | L" | WT.(LBS.) |
|--------|------|----|-----------|
| 536103 | 21.5 | 19 | 30.0 |

Requires 536060 fork attachment. 18" W x 17.75" L usable surface in center. Available with 25" chassis only.



Options and Accessories



Three-position handle provides additional grip points for increased comfort and maneuverability.

REMOTE P/N 534200

Tethered remote allows user to actuate lifting and lowering up to 6' away.

TOTE BAG 534500

Use the tote bag to store the remote and work bench accessories securely on the unit.


BATTERY CHARGER



P/N 63027

External battery charger allows you to charge an extra battery while the lift truck is in use to reduce downtime.

ONE SYSTEM. MANY TOOLS.

















PO Box 1468 Auburn St. Wollongong NSW 2500

1300 763 444 Fax: +61 2 4226 2208 ABN 98 002 454 462 Email: sales@spacepac.com.au

WWW.SPACEPAC.COM.AU